

## Godfrey Hinst FLOORS

## LAMINATE

### The floor of your home is the foundation of your interior style.

The sleek, contemporary design of Godfrey Hirst laminate floors offer an affordable and durable flooring option and has the beauty of a natural solid timber floor.

Manufactured in Germany, Godfrey Hirst Laminate floors are of the highest quality and durability with an accurate and authentic representation of timber.

Available in a variety of striking designs and colours, Vue, Amor, Belle and Mondo ranges are bursting with character and depth that will accentuate the beauty of any home and allow you to create your own unique space, it is the perfect foundation for years of memories.

With Godfrey Hirst laminate floors you are not just limited to decorating your floor. Our floors are an extremely versatile decorative surface product that can be used in both horizontal and vertical applications. This makes our range the perfect solution to creating your own unique space on both your floors and feature walls with minimal effort.

Thanks to the durability that comes with German manufacturing they can be used to impress in both residential and commercial spaces.



# VUE

Vue is a premium laminate flooring, creating elegant and hard wearing interior spaces. The 'embossed in register' textured grain (see page 14) reflects the warmth and richness of timber along with subtle micro bevelled edges and a matte finish.

Long, wide 12mm thick boards provide a solid acoustic underfoot. With an AC5 abrasion rating (see page 20), Vue is a durable laminate floor suitable for both residential and commercial applications.

### Standard

**Board:** 1845 x 188 x 12mm



HIGHLAND OAK Aged Brown - 2999



Box: 4 boards/1.387m<sup>2</sup>

Natural - 2801



HIGHLAND OAK Pearl Grey - 2800



MOUNTAIN OAK Heritage Brown - 3076



MOUNTAIN OAK Natural - 4152



MOUNTAIN OAK Parchment - 3081



MOUNTAIN OAK Shale Grey - 3178




PROVINCIAL OAK Natural - 4159




MOUNTAIN OAK Snow White - 3179



PROVINCIAL OAK Tawny Grey - 4165



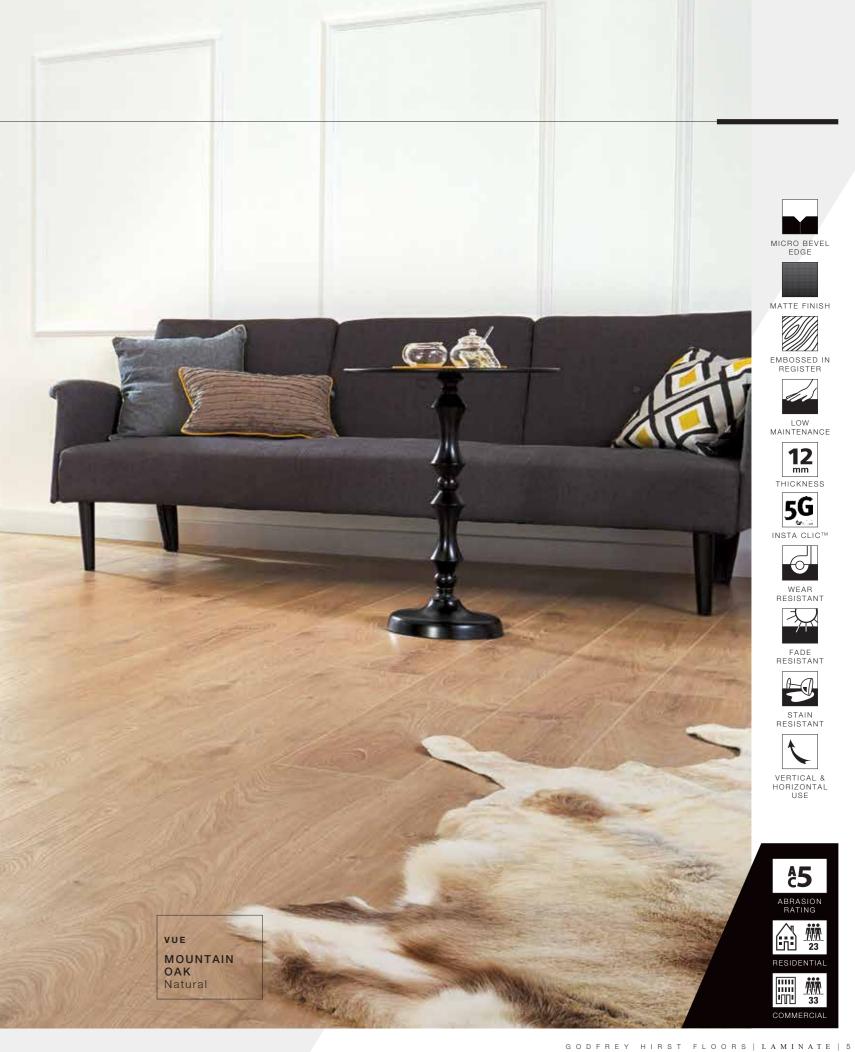

# AMOR

Amor is the latest range of our premium laminate flooring and offers nine new colours that harness the stylistic nature of timber, allowing you to create elegant and modern looking interior spaces with ease. The 'embossed in register' textured grain (see page 14) adds to the authentic look and feel of timber along with subtle micro bevelled edges and a matte finish.

Extra wide panels complement the colour range and allow you to create spacious and comfortable rooms.

### Standard

**Board:** 1845 x 244 x 10mm



MACRO OAK Light - 4752



MACRO OAK Brown - 4791



MACRO OAK Grey - 4792


**Box:** 4 boards/1.80m<sup>2</sup>



MACRO OAK White - 4793

HIGHLAND OAK

Titan - 4796








HIGHLAND OAK Silver - 4797





HIGHLAND OAK Black - 4798

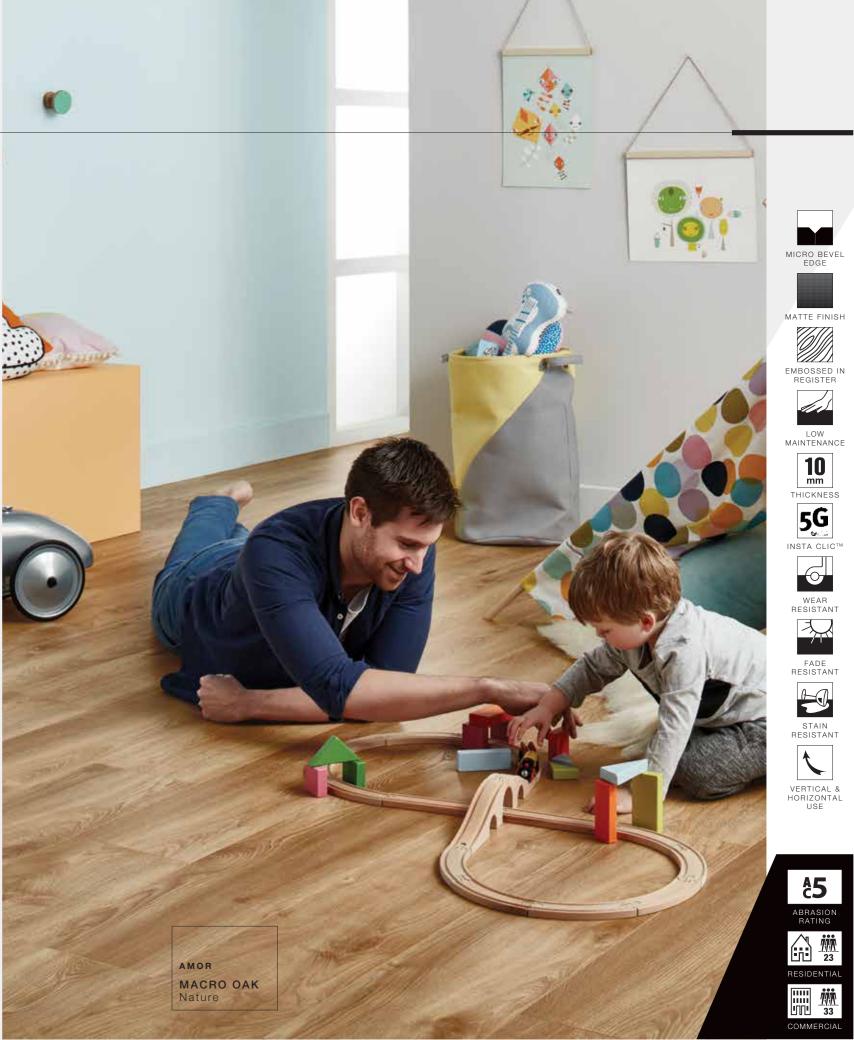

# BELLE

Belle Laminate flooring captures the natural beauty of timber. The 'embossed in register' textured grain (see page 14), matte finish and carefully milled micro bevelled edge break up the surface for an extremely resilient and authentic visual appeal.

With Belle, you don't have to be an interior design professional to develop cutting edge spaces that are not only sure to inspire, but will create the relaxed atmosphere to turn your house into a home.

### Standard

**Board:** 1380 x 193 x 8mm




SUMMIT OAK White - 4754



**Box:** 8 boards/2.131m<sup>2</sup>

DISTRESSED TEAK Natural - 4170



DISTRESSED TEAK Graphite - 4171




**PINNACLE OAK** Lime Wash - 2987

SUMMIT OAK

Saddle Brown - 4168

PETTERSON OAK

Beige - 4763



STIRLING OAK Doe Brown - 2805



TUSCAN WALNUT Natural - 3070



PETTERSON OAK Grey - 4765




SUMMIT OAK Natural - 4169



ALTO OAK Shades - 4760



GALA OAK Grey - 4786

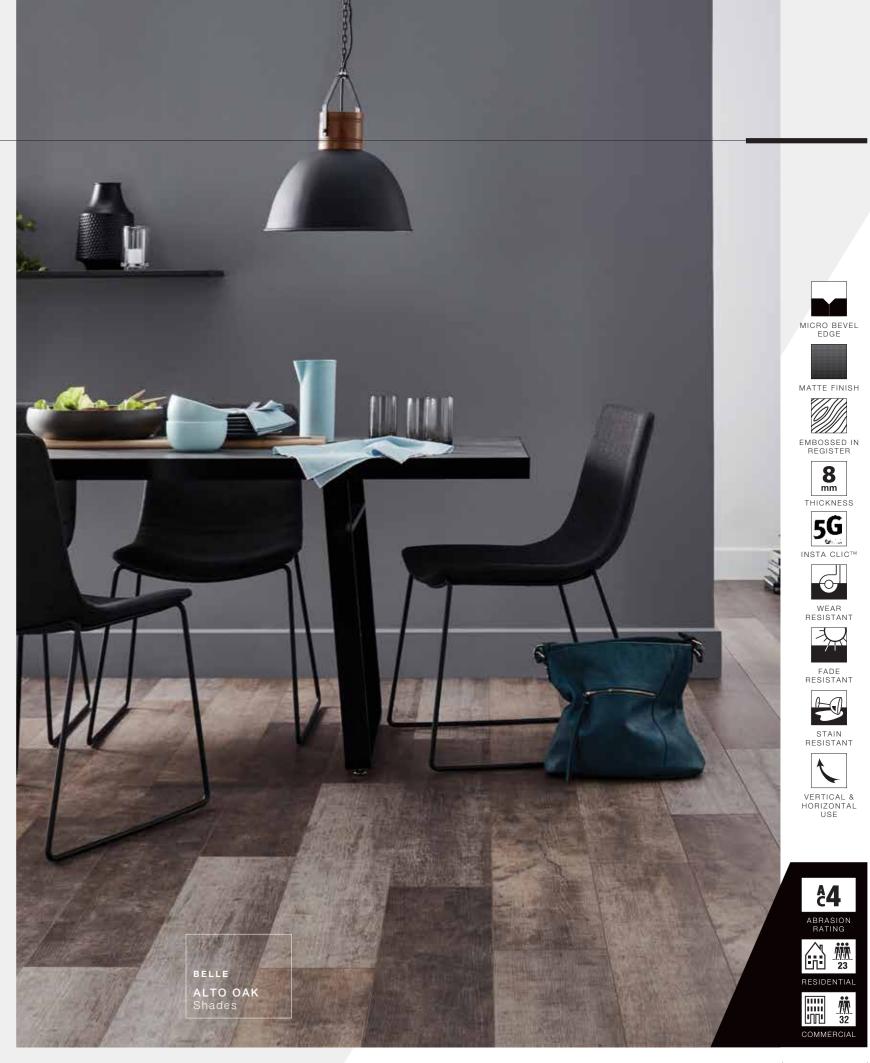

# BELLE

For the ultimate in style and affordability, select the extra wide board that the Belle range now offers in 10 inspiring colours.

The colours of the range radiate warmth and comfort and will create a natural ambiance that is sure to impress.

Accentuate the grand space in your room and realise your dream design with the exclusive colours below.

### Wide

**Board:** 1380 x 244 x 8mm



RIDGE OAK Antique Brown - 3044

PETTERSON OAK

Dark - 4766




DISTRESSED OAK Natural - 4164



PETTERSON OAK Nature - 4764




PALACE OAK




GALA OAK Nature - 4783

GALA OAK

White - 4787




Dark - 4767



Box: 8 boards/2.694m<sup>2</sup>



GALA OAK Titan - 4785

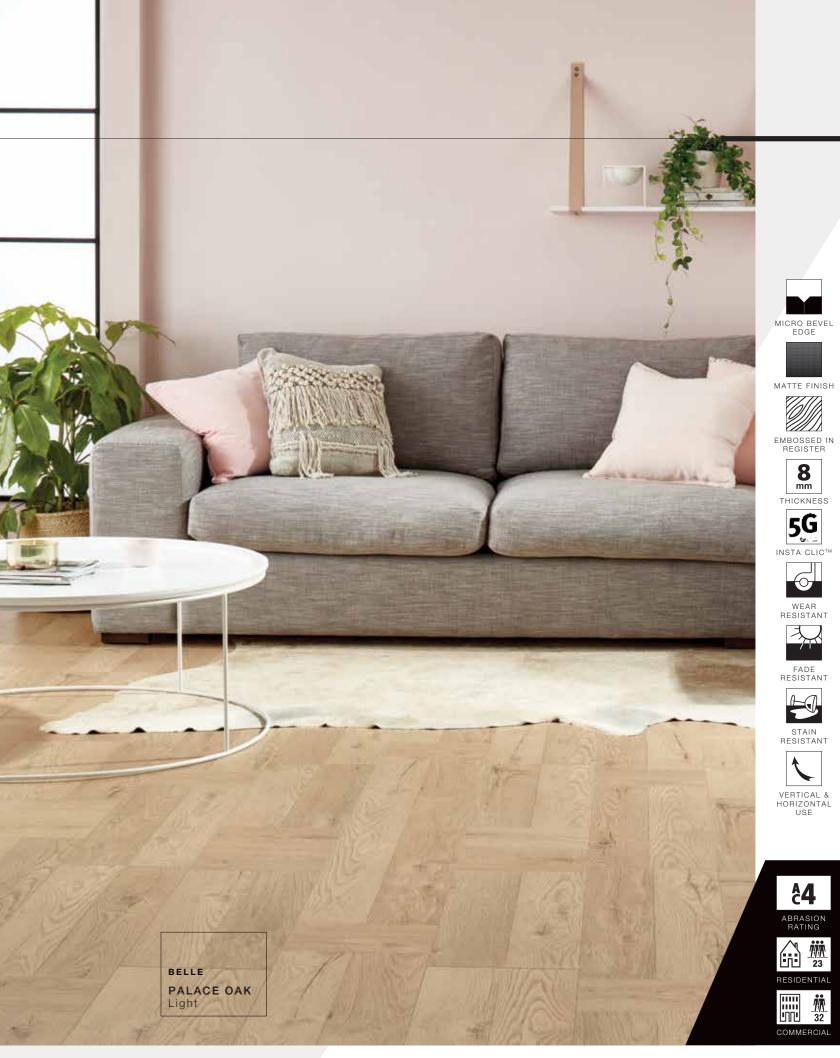

# M O N D O

With a variety of grain patterns and hues, Mondo is the ideal floor to suit any home décor. The distinctive natural grain gives an authentic timber appearance.

Traditional square edges provide a sleek contemporary finish, guaranteed to endure the busiest of households while maintaining a sophisticated and stylish look.

Box: 8 boards/2.131m<sup>2</sup>

### Standard

**Board:** 1380 x 193 x 8mm



CALLISTO OAK Beige - 4771



BARROW OAK Silver - 4781



CANADIAN MAPLE Pecan - 437




CUTTER OAK Sage Grey - 2450

LUXURY OAK


SCOTCH OAK

Rustic - 4774

Nature - 4775




PALAZZO OAK Walnut - 4757



LODGE PINE Old Grey - 4163




NORDIC ASH Limed Grey - 3007



LUXURY OAK Silver - 4155



MAJESTIC OAK Natural - 2928

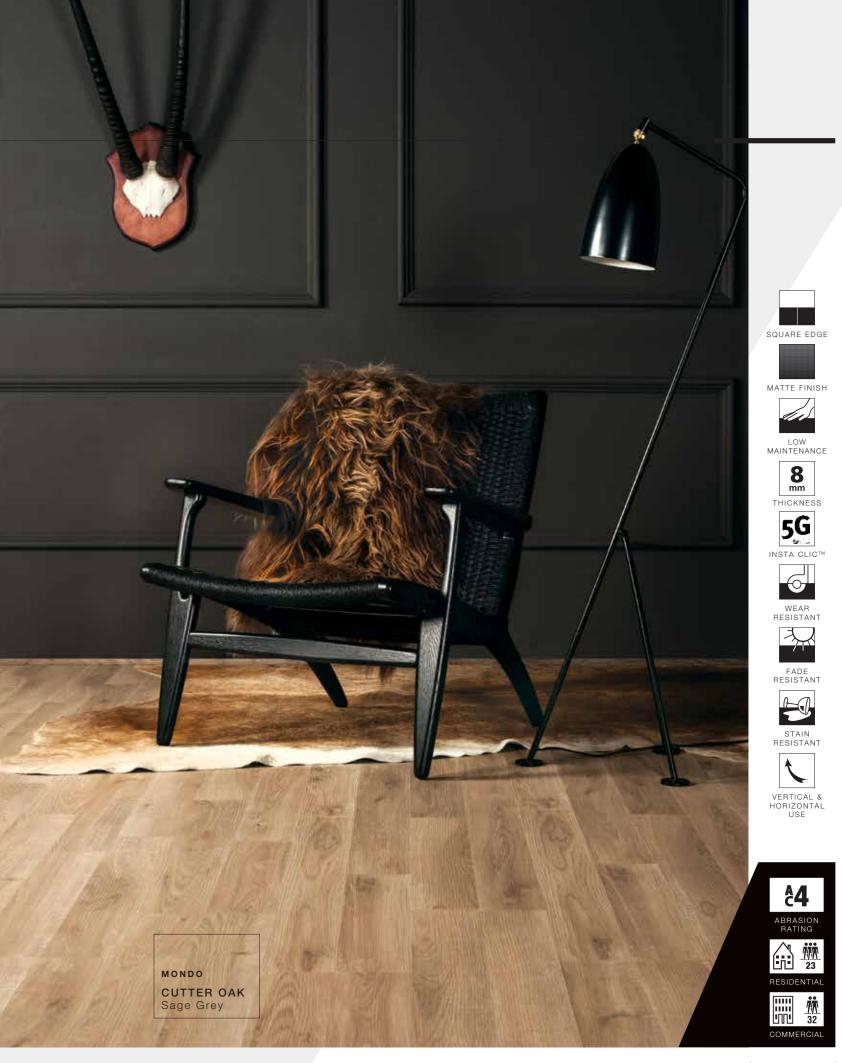


# FEATURES

Godfrey Hirst Laminate Floors are available in a unique range of profiles, surfaces and finishes. Look for these feature icons on product samples instore and online:

Profile	Feature	Benefits
	Micro Bevel Edges	Micro bevel edges create a small V-shape between each board for an authentic look.
	Square Edges	Square edge boards sit level for a sleek and seamless floor.
Finish	Feature	Benefits
	Matte Finish	Boards with a matte finish reflect the natural look and feel of timber.
	Embossed	Embossed in register is the textured embossing on the surface, which follows the grain to provide a dramatic level of realism.
	Vertical & Horizontal Use	Boards can be used in both a vertical and horizontal application.
	Low Maintenance	Low maintenance and easy to clean. Vacuums easily and marks can be removed with just a soft, damp cloth.

# Emissions Certification Benefits Image: Certification European E1 Emissions Standard Certification

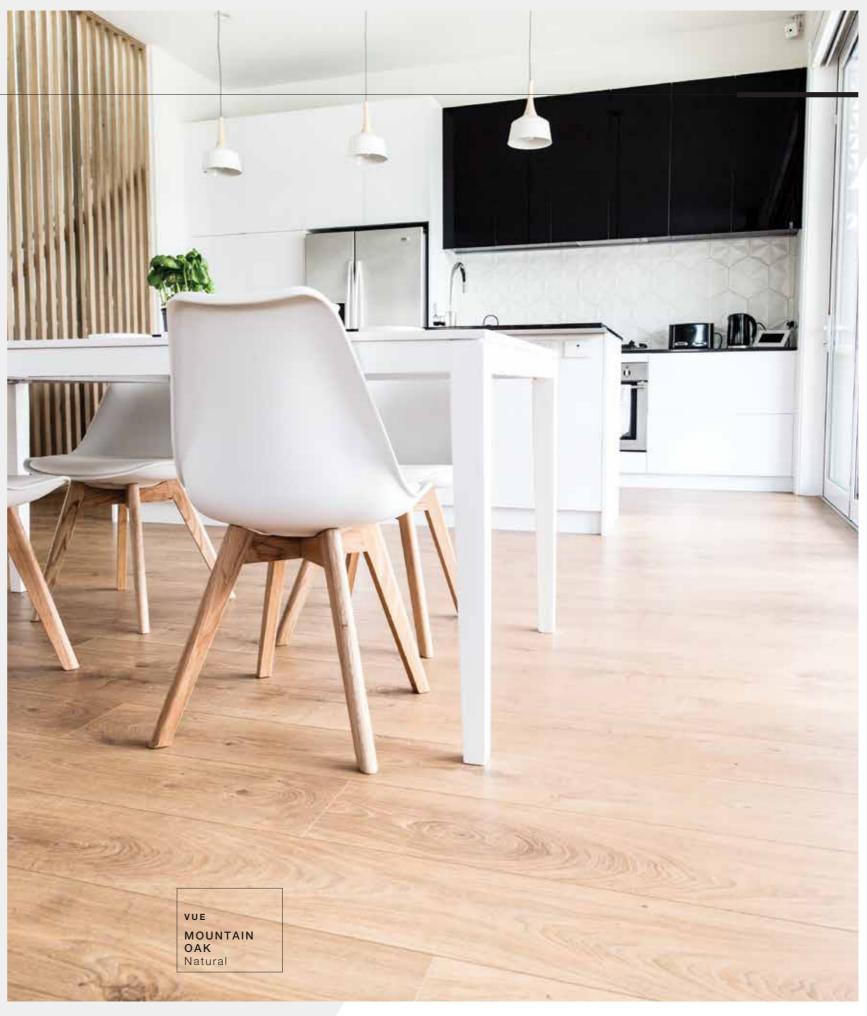

# 



- Aluminium oxide overlay for abrasion resistance rated AC4 or AC5
- Decorative layer for an accurate representation of timber
- 3. An HDF (High Density Fibreboard) core
- A balancing layer on the underside of the core to preserve structural stability





Vue, Amor, Belle and Mondo all feature the 5G Insta Clic<sup>®</sup> system, which allows for fast, simple DIY installation. In one single action, the boards snap and lock together with greater strength and stability. No glue or nails are required so you can install and walk on your floor the same day.

Underlay



Size:

**Arriba®/ Arriba Plus®:** 25m or 50m rolls NB: Underlay installed graphic side down. **Godfrey Hirst Arriba Plus® Underlay** is high quality acoustic underlay that has been designed to provide optimum acoustic performance and comfort under foot. It provides superior impact sound insulation.


**Godfrey Hirst Floors Underlay** range comprises of two options to ensure our underlay meets the requirements of your new floor.

**Godfrey Hirst Arriba® Underlay** is a high density, closed cell foam underlay that significantly reduces the noise of footsteps and integrates a moisture barrier between your floor and existing subfloor.

- Inert, does not deteriorate or mildew
- Good tear, tensile, and compression strength
- Levels out moderately rough structural floors
- Provides a moisture barrier
- Lays flat with good thickness tolerance
- Reduces the drum sounds of your floor
- Enhances underfoot comfort
- Excellent thickness tolerance
- Excellent tear, tensile, and compression strength
- Lays flat for easy installation
- · Will not mildew or hold moisture

# ACCESSORIES

Scotia




Size:

Piece:2400 x 15 x 15mmBox:Available by the piece

Laminate Scotia - The Godfrey Hirst Floors Scotia range has been produced to suit your laminate floor, and is the perfect way to conceal the expansion gap where your newly laid floor joins skirting boards, kickboards and the walls of the room.

Laminate Scotia is foil wrapped high-density fibreboard (HDF). With over 30 colours available to suit our laminate floors range you will find the perfect colour to complete your look.

All Godfrey Hirst Scotia can cover an expansion gap of up to 15mm and are all available by the piece. 3 in 1 Trim





Stair Nosing





**Stair Nosing** is available to complete your laminate floors by allowing you to incorporate your staircase for a sophisticated look.

### Size:

Laminate Piece: 2700 x 32 x 20mm Box: Available by the piece End Profile





**3 In 1 Trim** - The Godfrey Hirst Floors 3 in 1 Trim range has been meticulously designed for the Laminate Flooring range to ensure that the finishing touches in your new room are flawless. The range of trims can be used as a cover, ramp or end trim and have an adjustable plug system to ensure it meets all of these requirements.

The range is foil wrapped aluminium and is available in over 30 colours to suit the entire range of laminate floors. They are exceptionally hard wearing and are manufactured to achieve an AC3 abrasion rating.

### Size:

Piece:	2700 x 37.5mm
Box:	Available by the piece

**End Profile** - The Godfrey Hirst Floors End Panel range is the latest addition to the accessories range, and has been developed to ensure a clean finish to your floors, were the floor meets window frames, sliding door tracks or kitchen cupboards. It is available in a range of thicknesses and are foil wrapped aluminium and available in over 30 colours.

### Size:

Piece:	2700 x 8mm, suits 8mm laminates
	2700 x 12mm, suits 10/12mm laminates
Box:	Available by the piece

# R A T I N G S

### Abrasion Ratings

The abrasion ratings of laminate floors range from AC1 (bedroom) - AC5 (public buildings). Godfrey Hirst Vue, Amor, Belle and Mondo laminates achieve an abrasion resistance rating of AC4 or higher.



### **Class Ratings**

The class rating represents impact and stain resistance as well as the effects of furniture legs, castors, and other performance indicators. It is divided into Residential and Commercial. If the product is commercially rated, it will perform even better in your residential home.

A two digit numerical is shown within each icon where;

First digit indicates the rating: 2 = Residential 3 = Commercial Second digit indicates traffic intensity level: **1 = Moderate 2 = General 3 = Heavy** 

Class Ratings	Class	About
	2 Residential - 1 Moderate Traffic	Suitable for: bedrooms or guest rooms*
	2 Residential - 2 General Traffic	Suitable for: bedrooms, living rooms, dining rooms*
	2 Residential - 3 Heavy Traffic	Suitable for: bedrooms, living rooms, dining rooms, kitchens and hallways*
	<b>3 Commercial -</b> <b>1</b> Moderate Traffic	Suitable for: hotel rooms or small office*
	<b>3 Commercial -</b> <b>2</b> General Traffic	Suitable for: office, boutiques or cafés*
	3 Commercial - 3 Heavy Traffic	Suitable for: public buildings or department stores*

\*Excludes: bathrooms, toilets and laundries

# C O M M E R C I A L S P E C I F I C A T I O N S

## **VUE - Product Details**

Technical Data		Technical Data	1
Туре	Laminate	Colours	10 Decors
Plank Thickness	12mm	Country of Origin	Germany
Wear Layer	Aluminium Oxide	Finish	Matte
Dimensions	1845mm (L) x 188mm (W)	Profile	Micro Bevel
Planks per Box	4	Cubatrata Lavar	890kg/m <sup>3</sup> High Density
M² per Box	1.387m <sup>2</sup>	Substrate Layer	Fibreboard
M² per Pallet	77.672m <sup>2</sup>	Backing Layer	Melamine Resin
Installation Method	5G Insta Clic®		
Performance			
Abrasion Rating	AC 5		EN13329
Classification	23, 33		EN 13329
Light Fastness	> Level 6 Blue Wool So > Level 4 Grey Scale	<ul><li>&gt; Level 6 Blue Wool Scale</li><li>&gt; Level 4 Grey Scale</li></ul>	
Static Indentation	< 0.01mm - No Visible	Change	
Thickness Swelling	≤ 18%		EN13329-F
Flammability Rating	CRF 5.3kW/m2 Smoke Value 86% min	CRF 5.3kW/m2 Smoke Value 86% minutes	
Slip Resistance	R9, P3	R9, P3	
Residential Warranty	30 Years	30 Years	
Commercial Warranty	Available on Request		
Sustainability			
VOC Bating	CETEC and E1 complia	ant for VOC emission rate	limite

Performance	
Abrasion Rating	AC 5
Classification	23, 33
Light Fastness	<ul><li>&gt; Level 6 Blue Wool Scale</li><li>&gt; Level 4 Grey Scale</li></ul>
Static Indentation	< 0.01mm - No Visible Change
Thickness Swelling	≤ 18%
Flammability Rating	CRF 5.3kW/m2 Smoke Value 86% minutes
Slip Resistance	R9, P3
Residential Warranty	30 Years
Commercial Warranty	Available on Request

Sustainability	
VOC Rating	CETEC and E1compliant for VOC emission
Accreditation	FSC certified product

All product specifications and colourations are subject to nominal manufacturing tolerances. Materials supply and/or manufacturing process may be changed without notice. All Godfrey Hirst Floors Laminate products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Floors Laminate Installation Instructions.

<sup>†</sup>Warranty terms and conditions apply.

Test results and certificates are available on request.

🔒 CETEC







on rate limits

# C O M M E R C I A L S P E C I F I C A T I O N S

## **AMOR - Product Details**

Technical Data		Technical Data	
Туре	Laminate	Colours	9 Decors
Plank Thickness	10mm	Country of Origin	Germany
Wear Layer	Aluminium Oxide	Finish	Matte
Dimensions	1845mm (L) x 244mm (W)	Surface	Emboss in Register
Planks per Box	4	Profile	Micro Bevel
M² per Box	1.8m <sup>2</sup>	Substrate Layer	890kg/m3 High Density Fibreboard
M² per Pallet	75.6m <sup>2</sup>	Backing Layer	Melamine Resin

Installation Method

5G Insta Clic®

### Performance

Abrasion Rating	AC 5	EN13329
Classification	23, 33	EN 13329
Light Fastness	> Level 6 Blue Wool Scale > Level 4 Grey Scale	EN ISO 105-B02, A02
Static Indentation	< 0.01mm - No Visible Change	
Thickness Swelling	<b>≤</b> 18%	EN13329-F
Flammability Rating	9.2kW/m2 Smoke Value 11%	AS ISO 9239
Slip Resistance	R10, P2	
Residential Warranty	30 Years	
Commercial Warranty	Available on Request	

### Sustainability

Accreditation	FSC certified product
VOC Rating	CETEC and E1compliant for VOC emission rate limits

All product specifications and colourations are subject to nominal manufacturing tolerances. Materials supply and/or manufacturing process may be changed without notice. All Godfrey Hirst Floors Laminate products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Floors Laminate Installation Instructions.

<sup>†</sup>Warranty terms and conditions apply.

Test results and certificates are available on request.

## **BELLE - Product Details**

Technical Data		Technical Data	
Туре	Laminate	Colours	12 Decors
Plank Thickness	8mm	Country of Origin	Germany
Wear Layer	Aluminium Oxide	Finish	Matte
Dimensions	1380mm (L) x 193mm (W)	Surface	Emboss in Register
Planks per Box	8	Profile	Micro Bevel
M² per Box	2.131m <sup>2</sup>	Substrate Layer	890kg/m <sup>3</sup> High Density Fibreboard
M <sup>2</sup> per Pallet	119.336m <sup>2</sup>	Backing Layer	Melamine Resin
Installation Method	5G Insta Clic <sup>®</sup>		

Performance		
Abrasion Rating	AC 4	EN13329
Classification	23, 32	EN 13329
Light Fastness	> Level 6 Blue Wool Scale > Level 4 Grey Scale	EN ISO 105-B02, A02
Static Indentation	< 0.01mm - No Visible Change	
Thickness Swelling	≤ 18%	EN13329-F
Flammability Rating	CRF 5.4kW/m2 Smoke Value 29% minutes	AS ISO 9239
Slip Resistance	R9, P3	
Residential Warranty	25 Years	
Commercial Warranty	Available on Request	

### Sustainability

VOC Rating	CETEC and E1compliant for VOC emission
Accreditation	FSC certified product

All product specifications and colourations are subject to nominal manufacturing tolerances. Materials supply and/or manufacturing process may be changed without notice. All Godfrey Hirst Floors Laminate products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Floors Laminate Installation Instructions.

<sup>†</sup>Warranty terms and conditions apply.

Test results and certificates are available on request.



Œ













on rate limits

# C O M M E R C I A L S P E C I F I C A T I O N S

## **BELLE WIDE - Product Details**

echnical Data		Technical Dat	а
уре	Laminate	Colours	10 Decors
lank Thickness	8mm	Country of Origin	Germany
/ear Layer	Aluminium Oxide	Finish	Matte
limensions	1380mm (L) x 244mm (W)	Surface	Emboss in Register
anks per Box	8	Profile	Micro Bevel
² per Box	2.694m <sup>2</sup>	Substrate Layer	890kg/m <sup>3</sup> High Density Fibreboard
1² per Pallet	113.148m <sup>2</sup>	Backing Layer	Melamine Resin

Installation Method 5G Insta Clic®

### Performance

Abrasion Rating	AC 4	EN13329
Classification	23, 32	EN 13329
Light Fastness	> Level 6 Blue Wool Scale > Level 4 Grey Scale	EN ISO 105-B02, A02
Static Indentation	< 0.01mm - No Visible Change	
Thickness Swelling	<b>≤</b> 18%	EN13329-F
Flammability Rating	CRF 5.4kW/m2 Smoke Value 29% minutes	AS ISO 9239
Slip Resistance	R9, P3	
Residential Warranty	25 Years	
Commercial Warranty	Available on Request	

### Sustainability

Accreditation	FSC certified product
VOC Rating	CETEC and E1compliant for VOC emission rate limits

All product specifications and colourations are subject to nominal manufacturing tolerances. Materials supply and/or manufacturing process may be changed without notice. All Godfrey Hirst Floors Laminate products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Floors Laminate Installation Instructions.

<sup>†</sup>Warranty terms and conditions apply.

Test results and certificates are available on request.

## **MONDO - Product Details**

Technical Data		Technical Data	
Туре	Laminate	Colours	11 Decors
Plank Thickness	8mm	Country of Origin	Germany
Wear Layer	Aluminium Oxide	Finish	Matte
Dimensions	1380mm (L) x 193mm (W)	Surface	Emboss in Register
Planks per Box	8	Profile	Square Edge
M <sup>2</sup> per Box	2.131m <sup>2</sup>	Substrate Layer	890kg/m <sup>3</sup> High Density Fibreboard
M² per Pallet	119.336m <sup>2</sup>	Backing Layer	Melamine Resin
Installation Method	5G Insta Clic®	·	

Performance		
Abrasion Rating	AC 4	EN13329
Classification	23, 32	EN 13329
Light Fastness	> Level 6 Blue Wool Scale > Level 4 Grey Scale	EN ISO 105-B02, A02
Static Indentation	< 0.01mm - No Visible Change	
Thickness Swelling	<b>≤</b> 18%	EN13329-F
Flammability Rating	CRF 5.4kW/m2 Smoke Value 29% minutes	AS ISO 9239
Slip Resistance	P1	
Residential Warranty	25 Years	
Commercial Warranty	Available on Request	

### Sustainability

VOC Rating	CETEC and E1compliant for VOC emission
Accreditation	FSC certified product

All product specifications and colourations are subject to nominal manufacturing tolerances. Materials supply and/or manufacturing process may be changed without notice. All Godfrey Hirst Floors Laminate products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Floors Laminate Installation Instructions.

<sup>†</sup>Warranty terms and conditions apply.

Test results and certificates are available on request.











1-22 FSC



on rate limits

# N O T E S



# WARRANTIES

All Godfrey Hirst laminate floors are made in Germany and have wear, fade and stain resistance warranties to keep their beautiful finish in both residential and commercial applications.

Vue & Amor

### Belle & Mondo





\*These warranties are in addition to any rights consumers may have under Australian consumer laws. Conditions apply: For full information in respect to the scope and limitations of these warranties, this brochure must be read in conjunction with the Godfrey Hirst Floors Maintenance and Warranties guide (which also includes further information as to the installation, care and characteristics of Godfrey Hirst flooring products) available from your retailer, by calling 1300 444 778, or by download from www.godfreyhirst.com.

'Terms and conditions apply - contact your Godfrey Hirst Floors commercial account manager.

Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice.

Product images in the brochure should only be used as a guide or point or reference. Actual samples should be inspected at your nearest retailer to confirm texture and colour before making a purchase decision. It is also noted colour appearance can vary depending upon the type of light under which a sample is viewed and light sources where the flooring is installed.

Details correct at time of printing, JULY 2017. Please see www.godfreyhirst.com for latest version.







W W W . G O D F R E Y H I R S T . C O M

For information about your Godfrey Hirst floor or warranties and care please contact:

## GODFREY HIRST FLOORS ABN 58 000 849 758

PO Box 93 GEELONG VIC 3220

general.enquiries@godfreyhirst.com Freecall 1300 444 778